


Alcotest[®] 7410 Printer

- Printer for storage and logging of results obtained with Alcotest 7410/ 7410^{Plus} (RS)
- Optical data transmission
- Data report print-out
- Storage of 500 test results which can be transferred to a PC
- Optional: direct interface with an on line PC



The Alcotest 7410 Printer compliments the breath alcohol measuring instrument Alcotest 7410^{Plus}. It offers the facility to store up to 500 data sets which can either be printed out or transferred to a PC. The data format is compatible with conventional spread sheets. Optical transfer of data (serial no., date, time and measured value) is carried out by placing the 7410^{Plus} instrument on top of a special reading facility on the 7410 Printer. The Alcotest 7410 Printer can operate by using conventional mains supply, the 12 V supply used in most vehicles or by net independent alkaline battery supply.

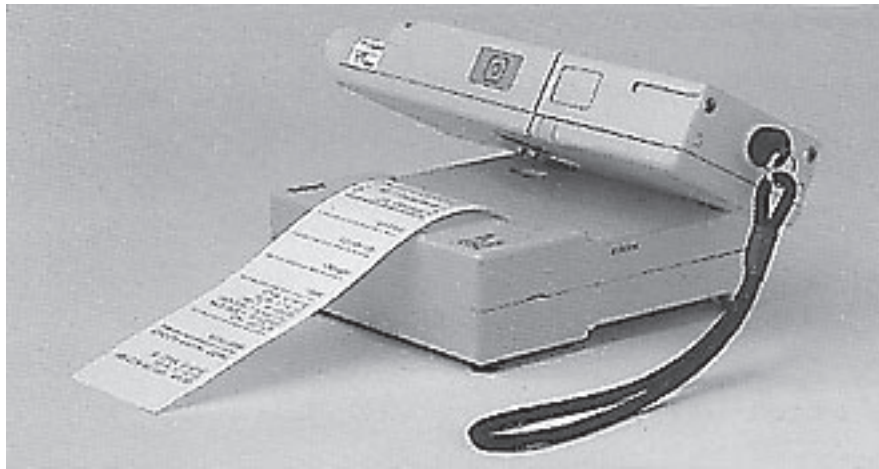

1-213-91

Technical data

For operation	
Temperature	0 to 50 °C (32 to 122 °F)
Humidity	10 to 95% r.h.
Atmospheric pressure	600 to 1300 hPa (0.6 to 1.3 atm)
For storage	
Temperature	-40 to 70 °C (-40 to 158 °F)
Humidity	10 to 95% r.h.
Atmospheric pressure	600 to 1300 hPa (0.6 to 1.3 atm)
Power supply	– mains supply 12 V/1 A – the 12 V vehicle supply or – alkaline battery supply
Dimensions	140 x 133 x 48 mm (W x H x D)
Weight:	approx. 500 g

Order-list

Name and description	Part-No.
Alcotest 7410 Printer	83 12 406
Consumables	
Ribbon cartridge	81 00 284
Printer paper (5 rolls) width 58 mm	81 00 318
Batteries (2 x) LR 6 DIN IEC 86 (midgset cell)	13 35 804
Accessories	
User has to choose between	
– Power pack 12 V/1A	
Input voltage 100 V to 240 V AC: 50/60 Hz	83 12 380
or	
– Alkaline battery supply	
with 10 mignon cells LR 6 DIN IEC 86	83 13 380
or	
– Connecting cable for vehicles (12 V)	
(Printer can only be inserted with one of these power supplies)	83 12 166
– Connecting cable for PC	83 12 160
– Software Package »RECALL«	83 13 140
For data read out of the Alcotest Printer and adjustment of printer options	

Dräger Sicherheitstechnik GmbH

Revalstrasse 1
D-23560 Luebeck
Germany
Tel. +49 451 882 - 0
Fax +49 451 882 - 20 80
www.draeger.com

DrägerService

Dräger equipment must always be fully operational and safe. DrägerService offers a regular inspection service and is quickly available in the event of mal-function. Your equipment will be repaired and back in operation as quickly as possible. DrägerService facilitates the vital flow of information between client and manufacturer.

Dräger Expertise

Since 1889, Dräger has had an outstanding reputation for solving problems in the field of human breathing. Dräger has been deeply involved in the handling of gases, in particular hazard protection and the saving of life in medical and industrial emergencies. Many of the company's 8500 employees are active in research and innovation to ensure that the latest techniques and scientific advances are fully tested before their inclusion in new equipment.

Dräger Worldwide

The Dräger sales and service organisation is spread through-out the world. It comprises more than 25 subsidiaries and associated companies to ensure that Dräger is always within easy reach of its clients and in close contact with all important markets. Dräger's ever increasing market share demonstrates the company's international competitiveness and strength. Dräger has subsidiaries in the following countries: Australia, Austria, Belgium, Bulgaria, Canada, China, Croatia, Czech Republic, Denmark, France, Great Britain, Hungary, Indonesia, Italy, Japan, the Netherlands, Norway, Romania, Singapore, South Korea, Slovenia, Slovakia, South Africa, Spain, Sweden, Switzerland, Yugoslavia, USA.

Additionally, Dräger is widely represented in Central and South America, Africa, the Middle East, the Far East and Eastern Europe.

Quality and Environmental Management

Our mission includes the continuous improvement of our Quality and Environmental Management Systems in accordance with ISO 9001 and ISO 14001.