

Dräger X-act® 7000 Multi-Gas Detector

The innovative Dräger X-act® 7000 analysis system consists of Dräger MicroTubes and an opto-electronic analysis device that lets you precisely measure gases in the low ppb range. It gives you precise results right on site, replacing slow, expensive lab analyses. It's extremely easy to use: insert the Dräger MicroTubes, start measuring, then read out the test result.



Benefits

Multi-Gas Detector

- Opto-electronic analysis system for selective detection of carcinogenic and toxic substances
 - Lab quality measurement in ppb range
 - To be used with Dräger MicroTubes
 - With coupler and X-am pump suitable for CSE
-

Measures the lowest-quantity concentrations with lab-quality analysis

Concentrations of hazardous substances in ambient workplace air must never exceed the defined limits. Monitoring these sometimes very low concentration levels is a responsible task. The Dräger X-act 7000 in combination with Dräger MicroTubes is focussed on measuring carcinogenic and toxic substances in the low ppb range. This sensitive testing system is based on colorimetric chemical sensors. These are capable of replacing conventional laboratory analysis and providing precise results right on site. This saves time and money.

More safety thanks to high selectivity

The substance-specific reactive layers and multiple pre-layers in the Dräger MicroTubes allow for selective gas testing. The various layers serve as a filter, for example. During testing, they filter out other substances that occur in the workplace so that only the target substance is reflected in the test result. This greatly eliminates cross-sensitivities and reduces the number of false-positive test results and false alarms.

Explosion-proof and ready to use

The RFID tags applied to the Dräger MicroTubes contain all the calibration data that apply throughout their normal lifespan of one year. This eliminates the need for lengthy function tests and manual calibration. Because it works on the basis of mass-flow measurement, air pressure fluctuations have no influence on the device. Any possible temperature or humidity influences are already accounted for during the factory calibration. The analyser is explosion-proof and certified under ATEX/IECEx for Zone 0. The system is also dust- and splash-resistant in accordance with IP54. It also meets the requirements for electromagnetic compatibility under EN 61326-1.

Easy to use

After an automatic self-test, the X-act 7000 analysis system is immediately ready for use. It is suitable for testing with all available Dräger MicroTubes. Simply insert the right Dräger MicroTube for your testing needs. The automatic drive carefully draws the MicroTube in and positions it. Control your test using the 3-button control and 2.4 inch colour display. When the test is complete, the green LED will glow and a message is displayed on the screen. You can store the test result, location and time in the internal data logger and read it later using the Dräger CC Vision software. The device is powered by five easily replaceable standard batteries. The life time of the recommended batteries lasts for more than ten hours of testing and can be read on the display.

Benefits

Also suitable for pump-assisted testing

Using the coupler (connector piece), the Dräger X-am® Pump can be adapted to the X-act 7000. This allows you to test for carcinogenic and toxic substances in the ppb range, even in hard-to-reach places like ducts, pipelines or tanks up to a distance of 45 metres (147.6 feet). Because the X-am Pump is also certified explosion-proof for Zone 0, it is perfectly suited for these tasks.

System Components



Dräger MicroTubes

With each set of MicroTubes, you can perform 10 tests in a row. The concentrations of hazardous substances are shown on the X-act® 7000 display. Specific MicroTubes even allow you to perform tests in the ppb range. The RFID tag applied to the Dräger MicroTube set contains all the calibration data that apply throughout their normal lifespan of one year. This eliminates the need for lengthy function tests and manual calibration.

Accessories



D-11862-2016

Dräger X-am® Pump for Dräger X-act® 7000

The Dräger X-am® Pump is an external pump for portable gas detection devices. In combination with the X-act® 7000, it allows you to perform remote testing (for example, inside tanks or ducts). To use it, simply attach the pump to the Dräger X-act® 7000 using a coupler. Control the pump using the X-act® 7000 software.



D-09652-2020

Coupler

The coupler is the connector between the Dräger X-act® 7000 analysis system and the Dräger X-am® Pump. It creates a secure, sealed connection between the two devices.



D-500851-2015

FKM hose

Solvent-resistant

Available in four lengths:

Inner diameter 3.2 mm, length 5 m (16.4 ft)

Inner diameter 3.2 mm, length 10 m (32.8 ft)

Inner diameter 3.2 mm, length 20 m (65.6 ft)

Inner diameter 3.2 mm, length 45 m (147.6 ft)



D-50855-2015

PVC hose


With PTFE inner-hose

Available in two lengths:

3 m (9.8 ft)

15 m (49.2 m)

Accessories

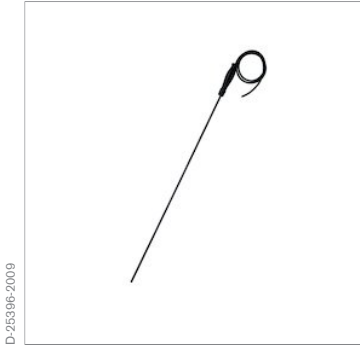

D-25396-2009

Telescopic probe

Available in four lengths:

70 cm (27.6 in)

90 cm (35.4 in)

100 cm (39.4 in)

150 cm (59 in)




D-6549-2017

Pre-tube holder

Pre-tube holders are needed to improve the sensitivity and selectivity of some Dräger MicroTubes even further. The pre-tube holder ensures a secure, sealed connection with the Dräger X-act® 7000.

Services

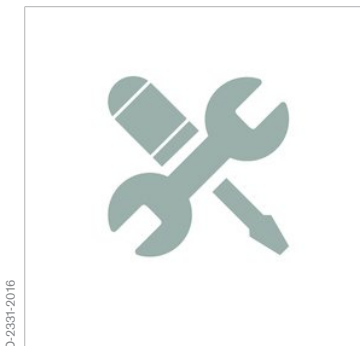

D-2331-2016

Product Service

Our product service provides support with different service packages – in our workshops or directly on your premises. Care, maintenance and servicing are crucial for safety and reliability – but careful maintenance and care are a must, even when it comes to commercial considerations. Preventive checks, ongoing care and use of original replacement parts improve the longevity of your investment.

Services



D-2335-2016

Training


The Dräger Academy has shared its solid, practical knowledge for over 40 years. We hold more than 2,400 training courses each year, on a range of over 600 topics, with more than 110 authorised trainers. We equip your staff with practical knowledge and ensure that what they learn can be applied effectively, both day-to-day and, more importantly, whenever critical situations occur. We will be pleased to develop a customised training programme for you.



D-2330-2016

Rental Service

From bridging a temporary shortage of equipment to procuring special equipment for applications involving specific requirements: If you only need to cover a temporary higher demand, then DrägerRental Service with over 65,000 pieces of rental equipment is an economical alternative to purchasing. Fast, straightforward and with a wide range of additional services available upon request.

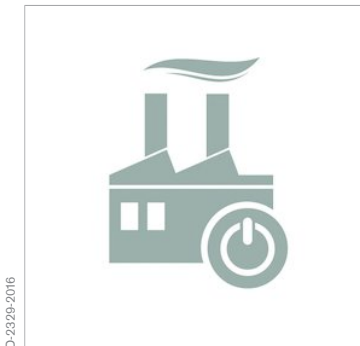

D-2329-2016

Shutdown Safety Service

In need of a comprehensive safety solution? Is there a long list of legal requirements you have to meet, and are you pressed for time? Balancing maximum efficiency with optimal security can pose major challenges. We can help you achieve that balance. Our Shutdown Safety Service is a solution that takes into account all the necessities of downtime and especially your individual requirements.

Technical Data

Measuring range and resolution	Varies, depending on the Dräger MicroTubes in use	
Typical testing time	From 5 seconds to 20 minutes, depending on the Dräger MicroTubes in use and the concentration of the test substance.	
Ready to use	Immediately	
Calibration	Not necessary	
Operating temperature	0 to +40 °C	
Storage temperature	-20 to +60 °C (Analyser) +4 to +25 °C (Dräger MicroTubes)	
Air pressure	700 to 1,300 hPa	
Humidity	0 to 95 % relative humidity, non-condensing	
Recording of measured data	CMOS sensor optics and LED light	
System diagnostics	Automatic, using micro-controllers for all system components	
Display	2.4 inch high contrast, colour display with a resolution of 240 x 320, viewing angle of 160°	
Menu languages	30	
Operating time	Approx. 600 minutes of testing time	
Power supply	5 x 1.5 v batteries	
Dimensions (L x W x H)	195 mm x 85 mm x 70 mm	
Approvals	ATEX / IECEx cCSAus Marine Approval	II 1G Ex ia IIC T4 Ga Ex ia IIC T4 Ga; Class I, Zone 0, AEx ia IIC T4 Ga DNV GL
Protection class	IP54, dust- and splash-resistant	

Dräger MicroTubes

Description	Test range	Part number
Ammonia	1 – 100 ppm	86 10 130
Ammonia	100 – 2,500 ppm	86 10 020
Benzene	1 – 150 ppb	86 10 600
Benzene	0.15 – 10 ppm	86 10 030
1.3-Butadiene	25 – 500 ppb	86 10 460
1.3-Butadiene	0.5 – 25 ppm	86 10 300
Carbon monoxide	2 – 1,000 ppm	86 10 080
Carbon dioxide	200 – 50,000 ppm	86 10 190
Chlorine	50 – 5,000 ppb	86 10 010
Ethylene oxide	25 – 250 ppb	86 10 200
Ethylene oxide	0.25 – 10 ppm	86 10 580
Formaldehyde	5 – 150 ppb	86 10 540
Formaldehyde	0.15 – 3 ppm	86 10 100
Hydrochloric acid	0,5 – 25 ppm	86 10 090
Hydrogen cyanide	0,5 – 25 ppm	86 10 520
Hydrogen sulfide	0.1 – 50 ppm	86 10 050
Mercury	0.005 – 0.25 mg/m ³	86 10 350
Nitrogen dioxide	0,25 – 25 ppm	86 10 120
Nitrous gases	0,25 – 50 ppm	86 10 060
Petroleum hydrocarbons	10 – 3,000 ppm	86 10 270
Sulphur dioxide	0,05 – 5 ppm	86 10 110
Toluene	10 – 1,000 ppm	86 10 250
Xylene	10 – 1,000 ppm	86 10 260

Ordering Information

Dräger X-act® 7000

86 10 800

consisting of: Basic device X-act® 7000 incl. batteries, shoulder strap complete, MicroTube Demo, Torx T10 screwdriver, USB cable 2 m with Mini-connection

Pump accessories

Dräger X-act® 7000 Coupler 86 10 810

Dräger X-am® Pump (incl. USB cable and power supply) 83 27 115

Other accessories

Dräger X-act® 7000 Pre-tube holder 37 01 985

Dräger Tubes®, ppb-Booster Basic 37 02 013

Tubeopener, TO 7000 64 01 200

Shoulder strap, compl. 83 26 823

Labelholder for shoulder strap 83 26 824

"Silver" Sticker Set, 5 pieces 83 27 645

"Blue" Sticker Set, 5 pieces 83 27 646

"Red" Sticker Set, 5 pieces 83 27 647

"Green" Sticker Set, 5 pieces 83 27 648

"Yellow" Sticker Set, 5 pieces 83 27 649

Carry case, 470 x 365 x 190 mm, black 37 03 690

Display protector film (3 pcs.) 83 26 828

Dust and water filter for pump inlet 83 19 364

Probes

ES150 Telescopic probe (max. length: 150 cm / 59 in) 83 16 533

Telescopic probe 100, incl. adapter
(max. length: 100 cm / 39.4 in) 83 16 530

Telescopic probe 90 (max. length: 90 cm / 35.4 in) 83 16 532

Telescopic leak probe 70 (max. length: 70 cm / 27.6 in) 83 16 531

Set probe GP 600 (length: 48 cm / 18.9 in), incl. 1.5 m FKM
hose (ID: 3 mm) and a male luer adapter 83 28 667

Hoses

PTFE-lined PVC hose, 3 m (9.8 ft) 83 26 980

PTFE-lined PVC hose, 15 m (49.2 ft) 45 94 679

Replacement hose for probes, 2 m (6.6 ft) 83 18 205

FKM hose, inner diameter: 3.2 mm, length: 5 m (16.4 ft) 83 25 705

FKM hose, inner diameter: 3.2 mm, length: 10 m (32.8 ft) 83 25 706

FKM hose, inner diameter: 3.2 mm, length: 20 m (65.6 ft) 83 25 707

FKM hose, inner diameter: 3.2 mm, length: 45 m (147.6 ft) 83 28 212

Hose connector, outer diameter: 5 mm (10 pcs.) 83 20 087

Adapter

Hose adapter, incl. 40 mm FKM (10 pcs.) 83 19 231

Reducer piece, incl. 30 mm FKM (10 pcs.) 83 20 086

Luer Adapter, male, 3 mm 83 27 641

Notes

Notes

Not all products, features, or services are for sale in all countries.
Mentioned Trademarks are only registered in certain countries and not necessarily in the country in which this material is released. Go to www.draeger.com/trademarks to find the current status.

CORPORATE HEADQUARTERS

Drägerwerk AG & Co. KGaA
Moislinger Allee 53–55
23558 Lübeck, Germany
www.draeger.com

REGION EUROPE

Dräger Safety AG & Co. KGaA
Revalstraße 1
23560 Lübeck, Germany
Tel +49 451 882 0
Fax +49 451 882 2080
info@draeger.com

REGION MIDDLE EAST, AFRICA

Dräger Safety AG & Co. KGaA
Branch Office
P.O. Box 505108
Dubai, United Arab Emirates
Tel +971 4 4294 600
Fax +971 4 4294 699
contactuae@draeger.com

REGION ASIA PACIFIC

Draeger Singapore Pte. Ltd.
61 Science Park Road
The Galen #04-01
Singapore 117525
Tel: +65 6872 9288
Fax: +65 6259 0398
asia.pacific@draeger.com

REGION CENTRAL AND SOUTH AMERICA

Draeger Panamá Comercial
S. de R.L.
59 East Street, Nuevo Paitilla,
House 31, San Francisco Town
Panama City, Panama
Tel +507 377-9100 / Fax -9130
servicioalcliente@draeger.com

REGION NORTH AMERICA

Draeger, Inc.
3135 Quarry Road
Telford, PA 18969
Tel +1 800 4DRAGER
(+1 800 437 2437)
Fax +1 215 723 5935
info.usa@draeger.com

Locate your Regional Sales
Representative at:
www.draeger.com/contact

